

# QUALITY AND PROPERTIES

---

- A spray can pre-filled with propellant and solvents. The paint is transferred via a filling device into the can to produce a ready-to-use end product (dealers liability)
- Simple, time-saving application
- Excellent atomisation
- Light blending

Ideal for spot or refinishing parts

# PHYSICAL AND CHEMICAL DATA

---

- **Colour:** depending on filling
- **Smell:** solvent
- **Efficiency:**  
Depending on consistence and colour of the ground
- **Substrate:**  
Depending on the colour of the substrate apply [Primer Filler HG1 - HG8](#), [2K Primer Filler](#) no. 195 327, [1K Primer for ALU](#) no. 190 278, [1K Primer for Zinc](#) no. 190 285, [1K Epoxy Primer](#) no. 174 414, [1K Filler](#), beige no. 856 556, ColorMatic 1K Filler, grey no. 874 987, cured paint sanded
- **Drying time (at 20°C, 50% relative air humidity):**  
The drying time depends on surrounding temperature, air humidity, thickness of the applied coat and the filled type of paint (refer to information of the paint manufacturer)
- **Storage stability:** empty cans: 5 years  
Filled cans: depending on type of paint from several hours up to 6 month (information from your specialist dealer). If appropriate storage provided (=10°-25°C, relative air humidity max. 60%)
- **Size:**  
Aerosol cans, maximum nominal volume 400 ml and 150 ml, filling quantity 100ml for no. 570704, filling quantity for 150ml can 37ml, no. M570707
- **VOC-value:** 218g

# ENVIRONMENT AND LABELLING

**Environmentally sound:** The products of MOTIP DUPLI are 100% free of heavy metals. The caps and packagings are made of recyclable material.

**Disposal:** Only the completely emptied cans should be put into the recycling skip or appropriate container for reclaimable refuse. Cans which are not empty should be disposed off as "special refuse".


**Marking/Labelling:** All products made by MOTIP DUPLI comply with the actual labelling regulations according to Preparation Guideline 1999/45/EG. All aerosols correspond to TRGS 200 and TRG 300 as well as to aerosol guideline 75/324/EWG in the actually valid version.

# USING INSTRUCTIONS

---

**Before use, carefully read and observe the warning texts on the label!**

- Clean the surface to be painted thoroughly with ColorMatic silicone cleaner no. 174 469, then sand
- Larger bare surfaces must be pre-primed with the appropriate ColorMatic primer
- The area must be dry and free of dust and grease
- Shake can vigorously for 2 minutes
- Carry out spray test
- Compatibility testing is necessary
- **For professional use only**
- **Wear an appropriate respirator (recommended type A2/P3)**

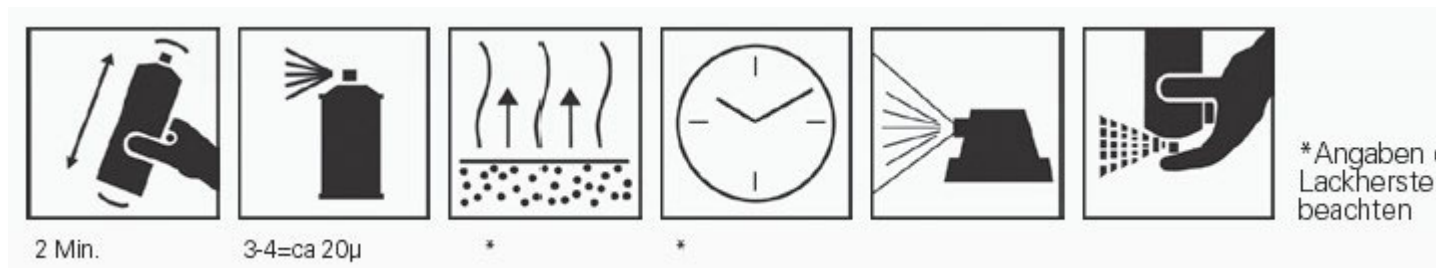

## ORDER INFORMATION

Color	Product	Bundle	Art.No.
*	CM pre-fill Standard T/V 112,5	150 ml	570707
*	CM pre-fill Standard T/V 275	275 ml	570704

[printing preview/further products](#)

*\* no color identification possible*

*The presentation of colors may deviate from the original color.*

*For printing of the order information please press "**printing preview/further products**".*

## EXAMPLES FOR USE



## DISCLAIMER OF LIABILITY

This application-technological information is given to the best of our knowledge. The notes mentioned herein are, however, non-binding and do not exempt you from own tests to see whether the products supplied by us are suitable for your special application. The use and processing is beyond our control and therefore exclusively in the responsibility of the user. MOTIP DUPLI is let off the liability, unless the liability-based incident is caused by a fault incurred to MOTIP DUPLI.

For any further technical questions call our hotline +49 (0) 62 66 75-266 from Monday to Thursday from 8h a.m. to 5 h p.m. or on Friday until 12 h p.m.

As of August 1, 2013

This release replaces all eventually earlier issued versions